

BLITZ Blast Chiller/Freezer


ANGELO PO – BF51MU Multifunction Blast Chiller/Freezer, Electric 1.52 kW 208-240V/60Hz/1 ph, 6.13 amps, (6) 12"X20" Full Size Sheet Pans Capacity.


Blitz Blast Chiller/Freezer, reach-in, self-contained, (5) 12" x 20" x 2-1/2" pan capacity, programmable controls, 48 lbs. from 194°F to 37°F in 90 minutes chilling cycle, 28 lbs. from 194°F to 0°F in 240 minutes freezing cycle, electric defrost, IFR system with multipoint temperature probe, USB, multicolor LED bar, HACCP software, removable drip tray, stainless steel wire rack, legs, stainless steel front, sides & top, R-404A, cETLus

- Lowest reachable temperature on chamber by blast chilling cycle: -35°F (-37°C)
- Highest reachable temperature on chamber by heating element / thawing mode use: 104°F (+40°C)

Model	BLITZ Blast Chiller/Freezer
Description	Electric 1.52 kW 208-240V/60Hz/1 ph, 6.13 amps, (6) 12"X20" Full Size Sheet Pans Capacity
Net Dimensions WxDxH	29,4"x29,2"x38,2" (74,65x74,15x97 cm)
Shipping Dimensions WxDxH	31,9"x30,3"x43,3" (81x77x110 cm)
Net Weight	265 lb (120 kg)
Shipping Weight	311 lb (141 kg)
12"X20" Hotel Pan Capacity	5
1/1 GN (530x325 mm) pan Capacity	6
18"X26" Full Size Sheet Pans Capacity	-
2/1 GN (650x530 mm) pan Capacity	-
Chill Capacity (194°F → 37°F)	48 lb
Freeze Capacity (194°F → 0°F)	28 lb
Electric Power	1.139 kW
Voltage	208-240V
Phase	1 ph
Amperes	6 amps
Cycle/Hz	60Hz
Unit H.P.	1

 Staking Solutions	n.a.
---	------

COOK&CHILL SYSTEM: Combi Oven Compatibility	FX61; FX101
---	-------------

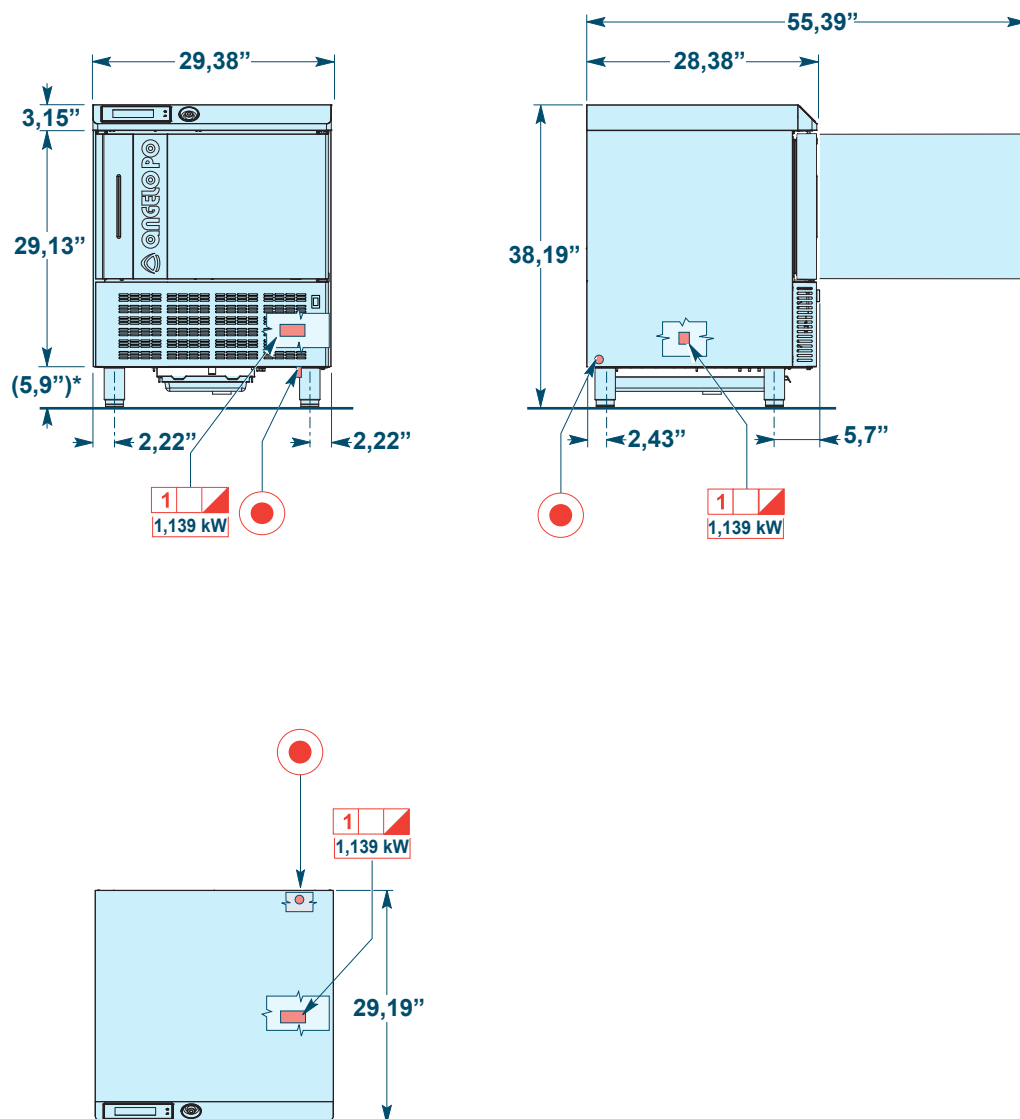

* Feet height-adjustable from 5,9" to 7,9"

 Allacciamento elettrico
Electric connection
Branchement électrique
Elektroanschluss
Conexión eléctrica

 Morsettiera
Terminal board
Plaque à bornes
Klemmbrett
Tablero de bornes
1~ N 220 V

Progetto - Lay Out - Projet - Entwurf - Proyecto	Area - Area - Area - Zone - Area	Posizione - Item - Position - Position - Posiccion
Offerta - Offer - Offre - Angebot - Oferta	Area - Area - Area - Zone - Area	Posizione - Item - Position - Position - Posiccion